


The John Guest 15mm Stop Valve has been developed to satisfy the requirements of the U.K. domestic plumbing market.

Two full handle rotations are required to turn off valve.

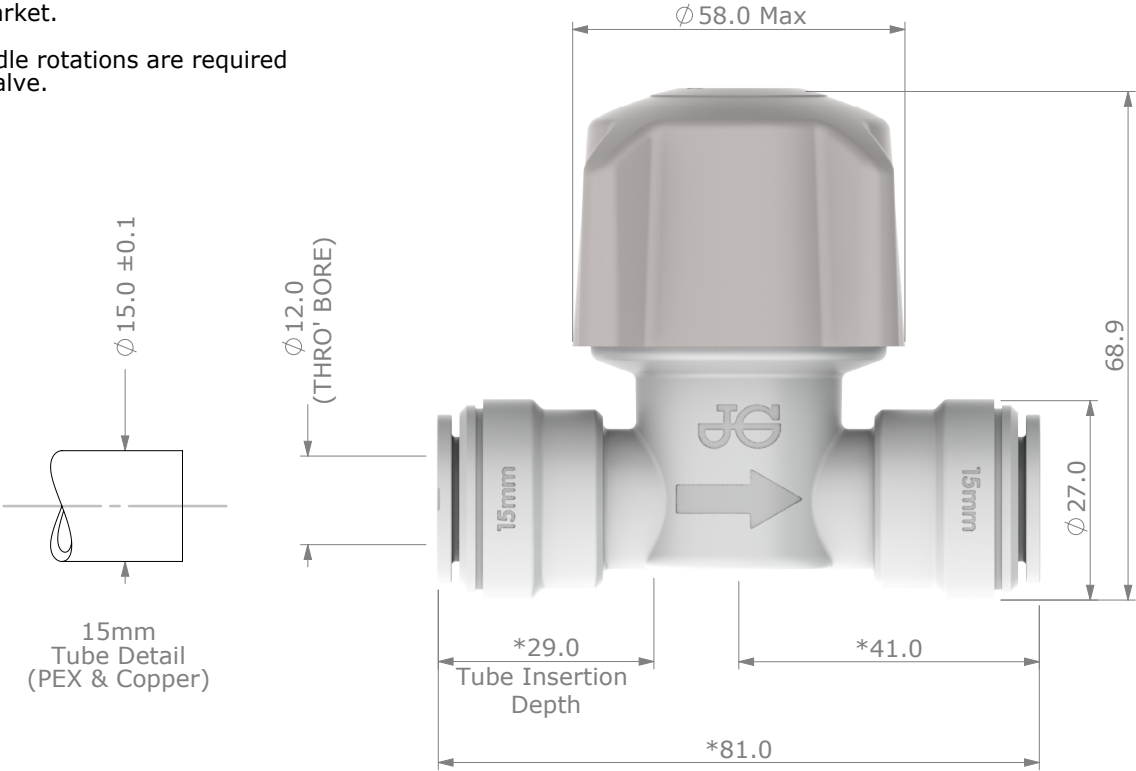

*With Collet(s) in release position

Dimensions in mm

Parts List			
Part Description	Material	Part Description	Material
Body	Acetal Copolymer (Unfilled), White	Top Cover	Nylon 66 (35% Glass Filled), Natural
Locking Ring	Acetal Copolymer (Unfilled), White	Handle	Polypropylene (25% Glass Filled), Light Grey
Face Seal	Ethylene Propylene (EPDM), Black	O'Rings	Ethylene Propylene (EPDM), Black
Seal Carrier	Acetal Copolymer (30% Glass Filled), Natural	Support Washers	Acetal Copolymer (Unfilled), Natural
Spindle	Nylon 66 (35% Glass Filled), Natural	Collets	Acetal Copolymer (Unfilled), White & Stainless Steel

Technical Information	
Working Pressures & Temperatures	Applications
12 Bar at 20 °C 6 Bar at 65 °C Minumum Temperature 1 °C	Domestic Plumbing Hot and Cold Use Only ✓

Speedfit®