


Data Sheet DS-PEM221515W

15mm Stem Elbow Connector

The John Guest 15mm Polyethylene Stem Elbow Connector has been developed to satisfy the requirements for the U.K. plumbing market and is Kitemarked BS 7291 class 'S' approval.

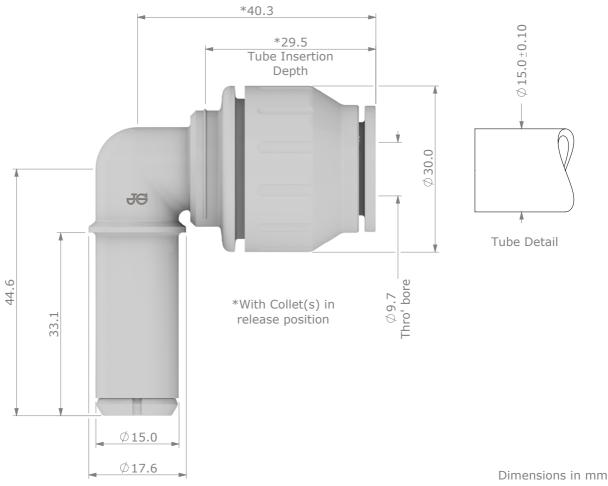

Parts List			
Part Description	Material	Part Description	Material
Body	Polyethylene (Cross Linked), White	Compression Ring	Acetal Copolymer (Unfilled), Dark Grey
Сар	Nylon 6 (Mineral Filled), White	O' Ring	Ethylene Propylene (EPDM), Black
Collet	Acetal Copolymer (Unfilled), White & Stainless Steel	Tube Support	Polysulphone (Unfilled), White

Technical Information			
Working Pressures & Temperatures	Applications		
Water: 12 Bar at 20 °C 6 Bar at 65 °C 3 Bar at 92 °C Minimum Temperature: 1 °C	Domestic Plumbing Central Heating ✓		

The Copyright in this drawing and the products referred thereon belong to John Guest International Limited and this drawing nor the information contained herein shall be produced in any form or used for any purpose without written consent \odot 2019

The company has a policy of continuous research and development and reserves the right to amend without notice the specification and design of all products illustrated. For details of Terms and Conditions and any other technical enquiries, please contact our Customer Services Department on 01895 449233. Alternatively, call our Technical Helpdesk on 01895 423333